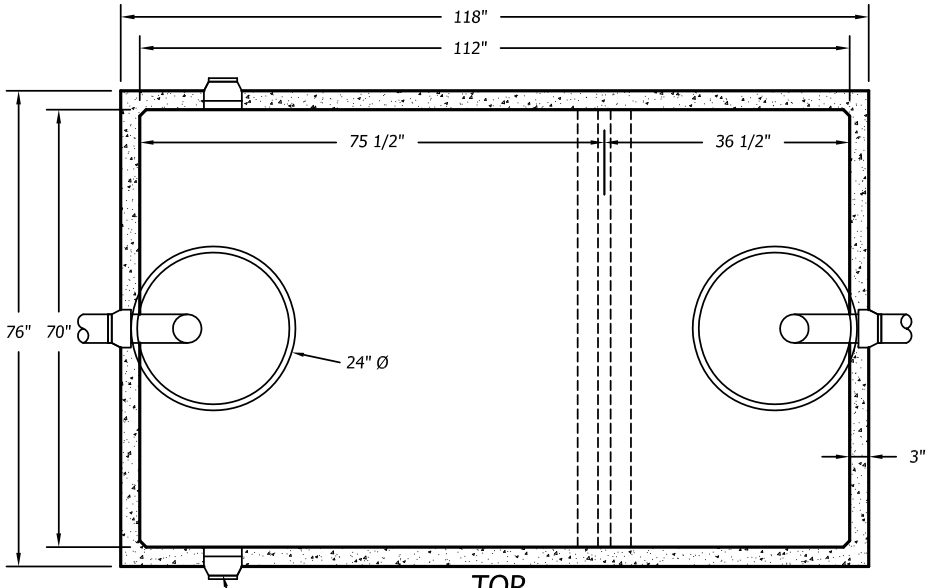

TOP

4" BOOTED PENETRATION (TYP.)

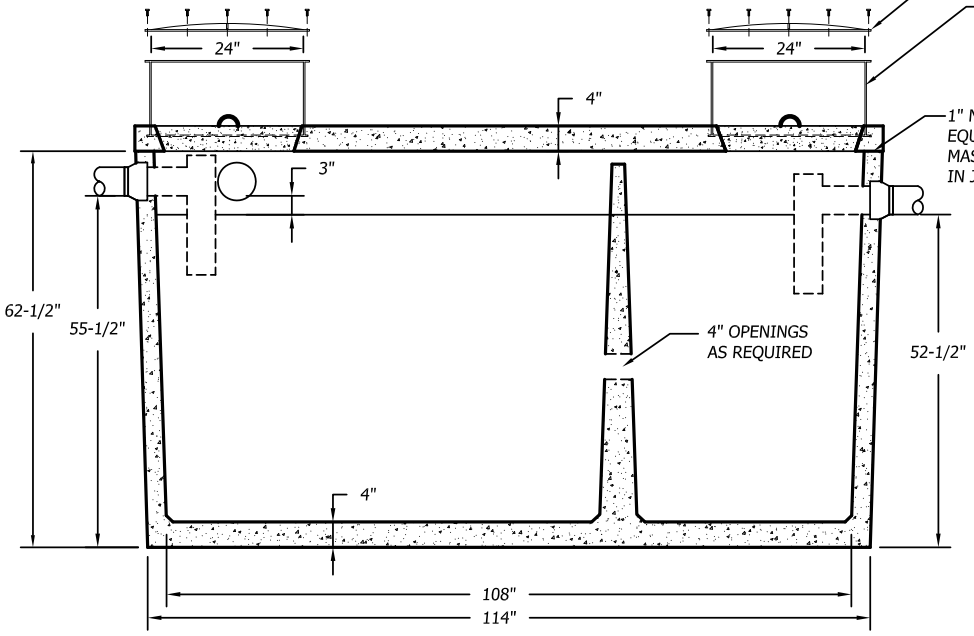

SECTION

SPECIFICATIONS:

1. THE SEPTIC TANK MUST BE EQUIPPED WITH AN EFFLUENT FILTER THAT HAS BEEN TESTED AND SHOWN TO PREVENT THE PASSAGE OF SOLIDS LARGER THAN ⅛ INCH.
2. CAPACITY = 1,513 GALLONS
3. FULL CAPACITY = 1825 GALLONS
4. GALLONS PER INCH = 31.19 (AVERAGE)
5. WEIGHT = 13,000 POUNDS±
6. TANK TO MEET ASTM 1227C REQUIREMENTS
7. TOP SEAM CONSTRUCTION
8. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPICAL OF CONSEAL CS-102.
9. NOT DESIGNED FOR TRAFFIC AREAS
10. ALL DIMENSIONS SHOW ARE PER ONSITE SEPTIC SOLUTIONS, LLC PRODUCTS 2011.

SPECIAL NOTE:

THIS TANK IS VACUUM TESTED PER ASTM 1227C STANDARDS AT ON-SITE SEPTIC SOLUTIONS, LLC PRODUCTS PRIOR TO BEING SHIPPED.

OnSite SEPTIC SOLUTIONS, LLC

1,500 GALLON (2 COMPARTMENT) TOP SEAM HEAVY DUTY PRECAST CONCRETE SEPTIC TANK

1/2" = 1'-0"

BUSINESS PARK AT CAMBRIDGE
CAMBRIDGE, VT. 05444
paul@onsitesepticsolutions.biz
TEL. 802-644-5500